


# Group central GC-series

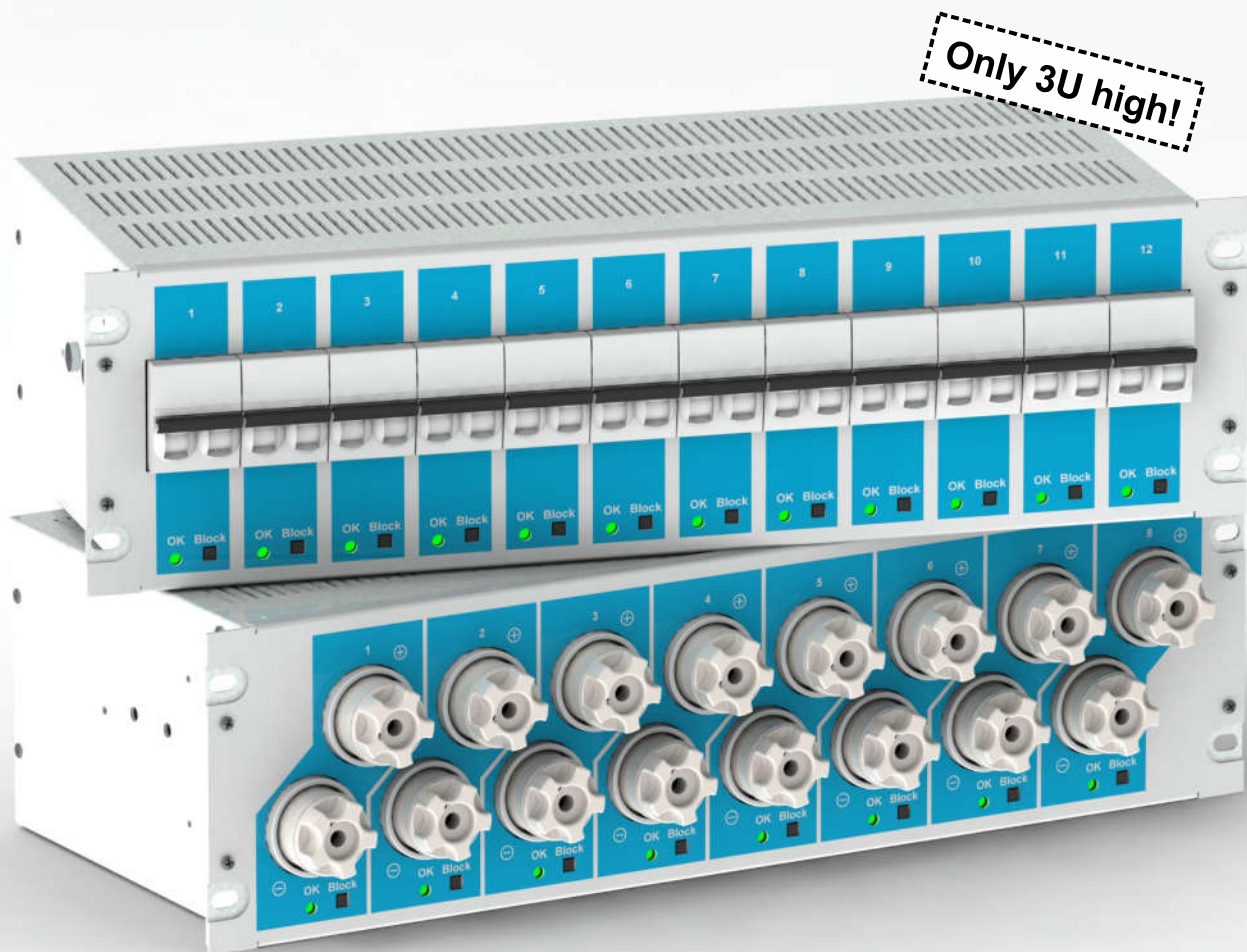

**Group central for 19" rack mounting with diazed or MCB.**

**Each group protected by a 2-pole fuse.**

**LED indicator for each group.**

**Change-over potential free sum alarm relay.**


**Alarm blocking via switch for each group.**

**Connections through terminals on backside of enclosure or cable harness.**

**3U high.**

## Technical data

|                              |   |
|------------------------------|---|
| <b>Voltages</b>              | 12, 24, 36, 48, 60, 72, 110, 120, 220 VDC.  |
| <b>Number of groups</b>      | Diazed: 8 pcs. 2-pole. MCB: 6 pcs. or 12 pcs. 2-pole.   |
| <b>Fuse type MCB</b>         | Max 25 A.   |
| <b>Fuse type diazed</b>      | DII max 25 A.   |
| <b>Max input current</b>     | 63 A.   |
| <b>Indications</b>           | Green light when voltage present. No light when fuse is tripped.  |
| <b>Input terminals</b>       | 10 - 25 mm <sup>2</sup> .   |
| <b>Output terminals</b>      | 0,2 - 4 mm <sup>2</sup> .   |
| <b>Alarm relay terminals</b> | 0,2 - 4 mm <sup>2</sup> .   |
| <b>Relay load max</b>        | 8A/250 VAC, 8A/30 VDC, 1A/60 VDC, 0,2A/220 VDC.   |
| <b>Dimensions HxWxD</b>      | 3U x 19" x 250 mm (D = part protruding into rack).  |
| <b>Ingress protection</b>    | IP20.   |
| <b>Color</b>                 | RAL 7035 and process blue.  |
| <b>Options</b>               | - Cable harness with or without end terminals.<br>- Fuse ratings, characteristics and models according to requirements. |

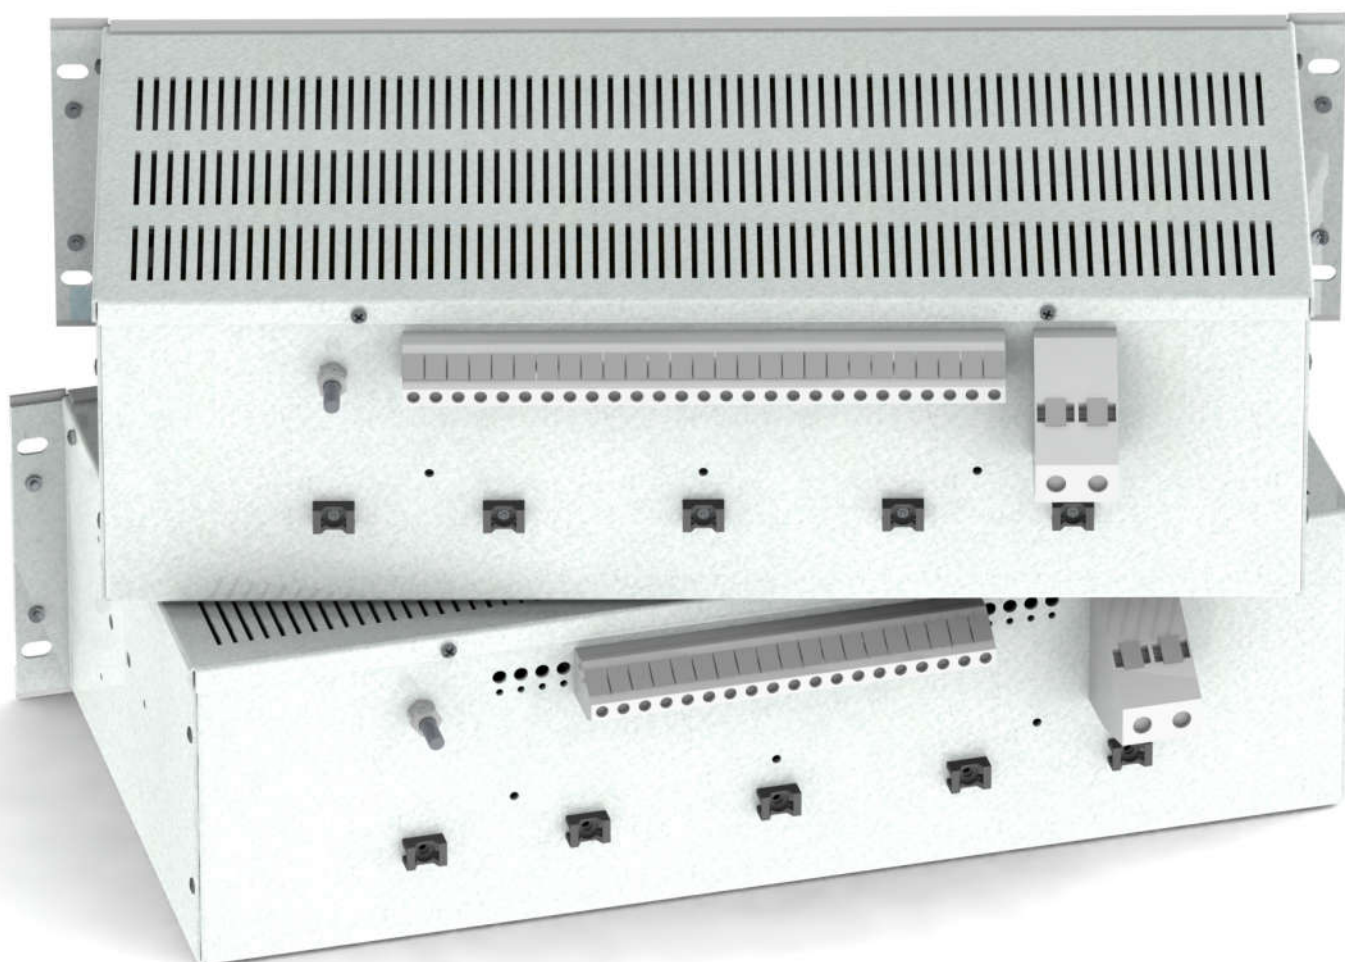

For information, ordering and service:



Tel: +46 (8) 522 478 30  
info@dcpartner.se, www.dcpartner.se  
Box 401, 184 26 ÅKERSBERGA



Subject to change without notice  
Copyright © DC-Design AB  
B1957-2