

## **Group central GC-series**

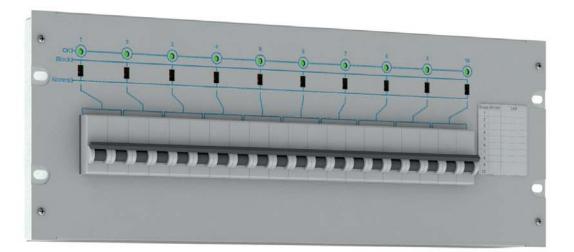

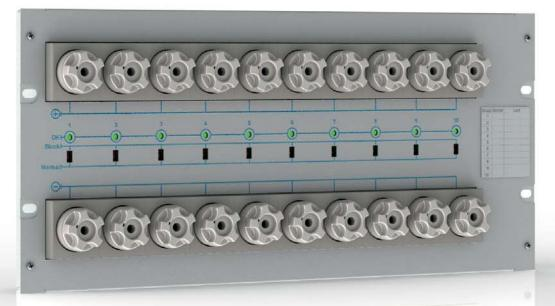

Group central for 19" rack mounting with diazed fuses or circuit breakers

Each group is protected by a 2 pole fuse

LED indicator for each group

Alarm blocking via switch for each group

Alarm output through potential free switching sum alarm relay

Terminals on backside of enclosure for inputs, outputs and alarm relay


Changable label on frontside for documenting fuse type, etc



## **Technical data**

Voltages	12, 24, 36, 48, 60, 72, 110, 120, 220 VDC
Number of groups	10pcs. 2-pole
Fuse type circuit breaker	Merlin Gerlin B-characteristic
Fuse type diazed	DII
Max fuse size	25 A
Max total current	63 A
Indicators	Lit (green) when voltage is present on outputs. Turned off otherwise.
Input terminals	10 - 25 mm2
Output load terminals	0,2 - 4 mm2
Alarm terminals	0,2 - 4 mm2
Relay load max	8A/250VAC, 8A/30VDC, 1A/60VDC, 0,2A/220VDC
Dimensions GCA HxBxD	4 HE x 19" x 100mm (D = part protruding into rack)
Dimensions GCD HxBxD	5 HE x 19" x 95mm (D = part protruding into rack)
Ingress Protection	IP20
Color	RAL 7035
Options	2 meter cable with external terminals
	Other brands of characteristics on the circuit breakers

Œ

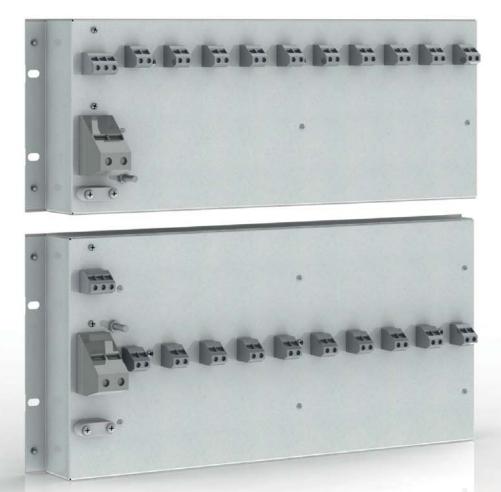

For information, ordering and service: DC-Design AB, Tel. +46 (8) 522 110 20 info@dc-design.se, www.dc-design.se Hovslagarevägen 2, 192 54 SOLLENTUNA



Subject to change without notice Copyright © DC-Design AB B1947-3