
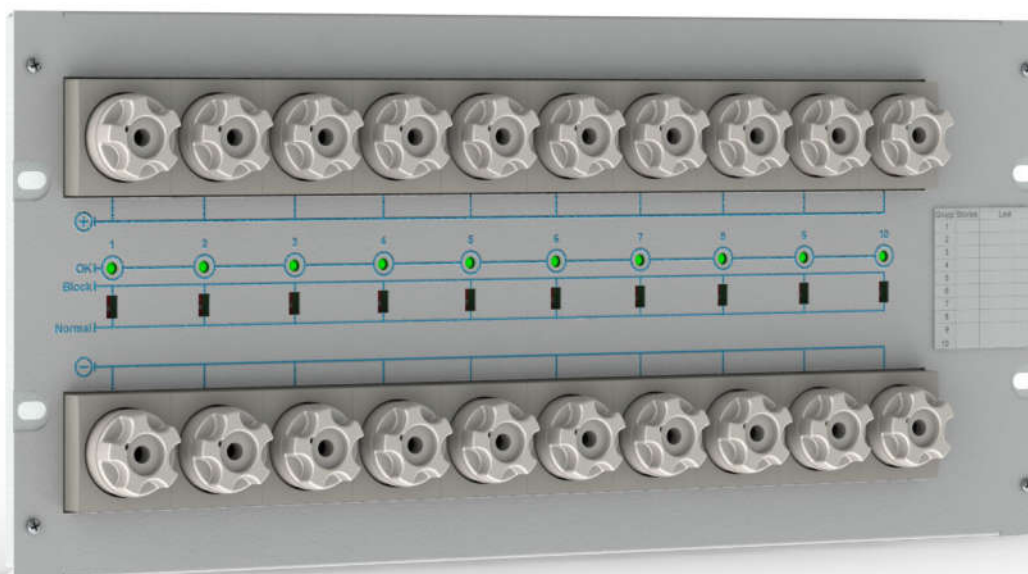


Group central GC-series

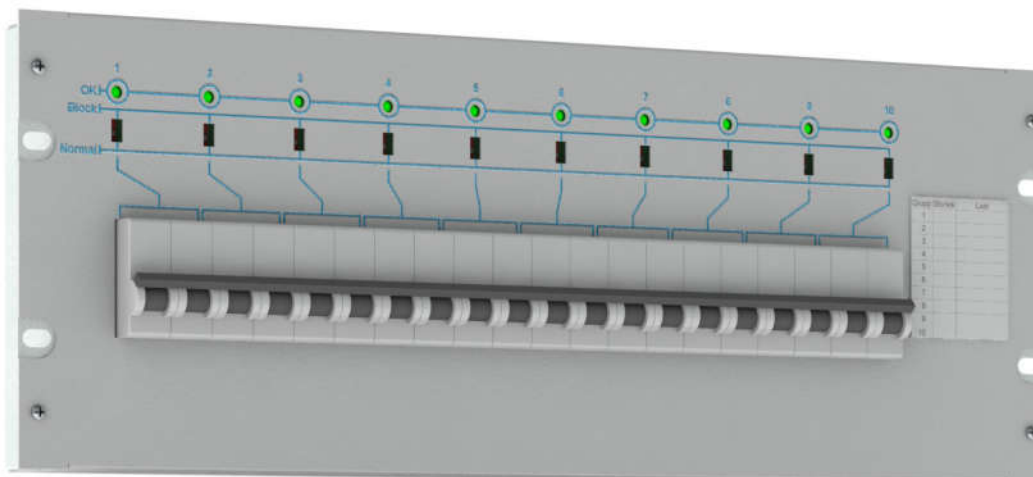

Group central for 19" rack mounting with diazed fuses or circuit breakers

Each group is protected by a 2 pole fuse

LED indicator for each group

Alarm blocking via switch for each group



Alarm output through potential free switching sum alarm relay

Terminals on backside of enclosure for inputs, outputs and alarm relay

Changable label on frontside for documenting fuse type, etc

Technical data

Voltages	12, 24, 36, 48, 60, 72, 110, 120, 220 VDC
Number of groups	10pcs. 2-pole
Fuse type circuit breaker	Merlin Gerlin B-characteristic
Fuse type diazed	DII
Max fuse size	25 A
Max total current	63 A
Indicators	Lit (green) when voltage is present on outputs. Turned off otherwise.
Input terminals	10 - 25 mm ²
Output load terminals	0,2 - 4 mm ²
Alarm terminals	0,2 - 4 mm ²
Relay load max	8A/250VAC, 8A/30VDC, 1A/60VDC, 0,2A/220VDC
Dimensions GCA HxBxD	4 HE x 19" x 100mm (D = part protruding into rack)
Dimensions GCD HxBxD	5 HE x 19" x 95mm (D = part protruding into rack)
Ingress Protection	IP20
Color	RAL 7035
Options	2 meter cable with external terminals Other brands of characteristics on the circuit breakers

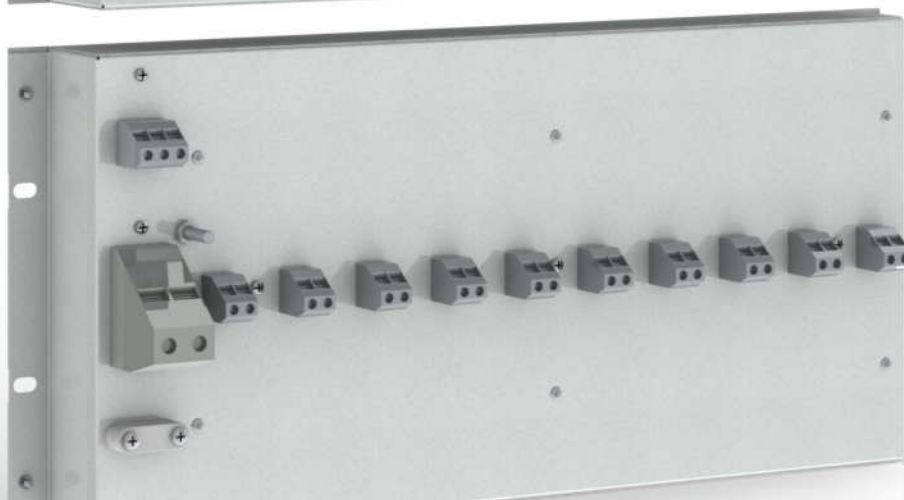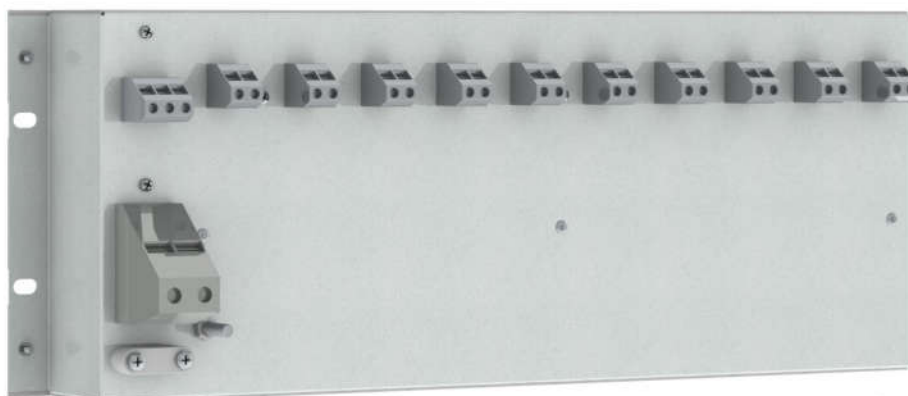

For information, ordering and service:



Tel: +46 (8) 522 478 30
info@dcpartner.se, www.dcpartner.se
Box 401, 184 26 ÅKERSBERGA



Subject to change without notice
Copyright © DC-Design AB
B1947-3